

The AW-CSS2166EX Strobe have excellent explosion-proof performance. it is suitable for hazardous locations which include explosive gas environment.


The AW-CSS2166EX can be used with manual alarm button to make up a simple alarm-system. And it can be used with the most fire alarm panel system.

The AW-CSS2166EX use ultra-bright LED, it has long services life and low power consumption.



Features

- ✓ Ultra-Bright LED
- ✓ Excellent explosion-proof performance

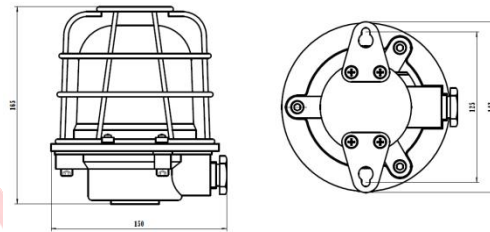

Technical Specification

Model	AW-CSS2166EX
Voltage	DC24V
Alarm current	50mA
Ex-Atex Protection Level	Exd II C T6 Gb
Protection Level	IP65
Outlet Thread	G15
Environmental	Temperature range: -20 to 50°C (-4~122°F) Humidity: 5 to 95% RH, non-condensing
Materials and colors	Cast Iron, PC, RED
Size	152mm* 152mm* 165mm
Weight	about 1.2kg