


The AW-D105EX addressable manual call point has excellent explosion-proof performance. It is suitable for hazardous locations which include explosive gas environment.

The AW-D105EX Addressable manual call point is mainly designed to be used with an intelligent two-bus control system. If it is pressed after a fire is manually confirmed, an alarm signal may be sent to a fire alarm control system which will, after receiving the alarm signal, display the coded address and the equipment status of the manual fire call points. When the manual fire call point is operating normally, the red indicator will blink; when there is a fire alarm, it will remain lit. The AW-D105EX Addressable supports electronic coding, more suitable for engineering application convenient.




Features

- ✓ Excellent explosion-proof performance
- ✓ Semi-flush or surface mounting
- ✓ Compatible with the latest EN standards
- ✓ Lever reusable (non-glass break)
- ✓ LED indicator
- ✓ Full electronic coding, through AW-PR101 encoder scene rewrite

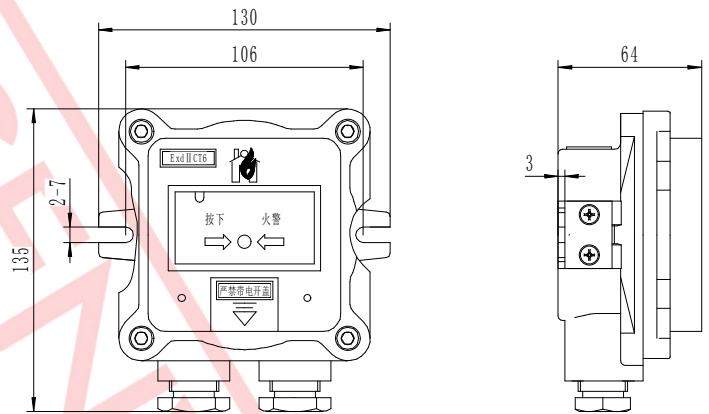

Technical Specification

Model	AW-D105EX
Voltage	LOOP24VDC
Explosion Proof Mark	Ex II 2 G Ex d IIC T6 Gb
Alarm Current	≤ 10mA
Mating Host	AW-FP100 addressable fire alarm control panel
Outlet Thread	G20
Environmental	Temperature range: -20 to 50°C Humidity: 5 to 95% RH, non-condensing
Materials and colors	Cast Iron, ABS, RED
Size	135mm* 130mm* 64mm
Weight	about 1kg