


Wireless LoRa to Wi-Fi repeater can be used for Asenware addressable fire alarm panel and battery smoke detector, heat detector, smoke and heat detector and MCP.


The repeater is connected to the mobile phone APP (tuya) through Wi-Fi, and people can remotely check the fire situation in real time.

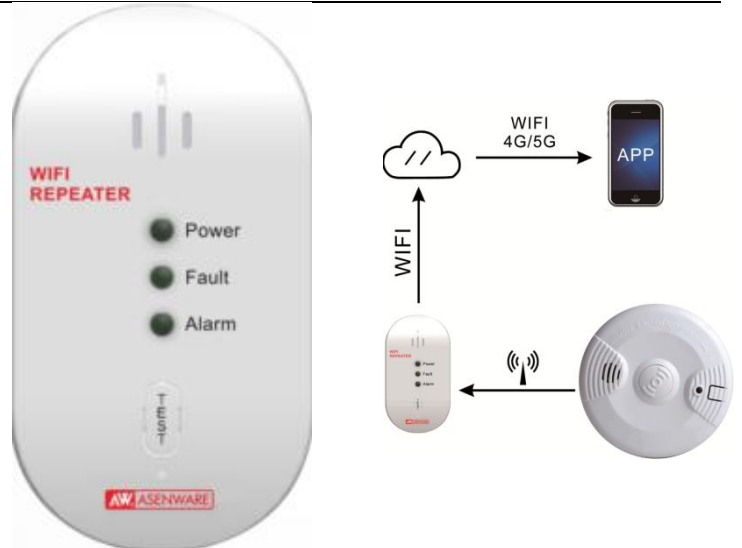

Features

- ✓ Easy to install, mounting bracket included
- ✓ Wireless LoRa module with strong long-distance penetration
- ✓ High performance Wi-Fi module
- ✓ LED indicator
- ✓ Simple and easy to use APP

Installation

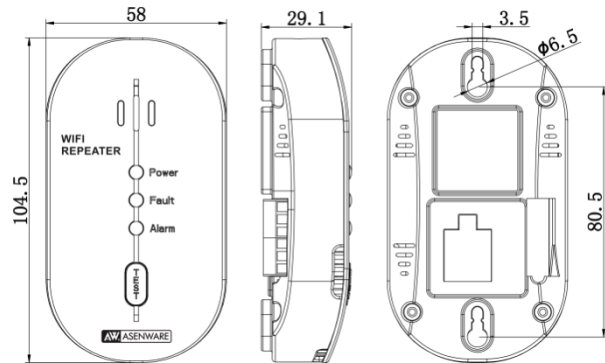

Technical Specification

Model	AW-D139
Operating voltage	DC 5V (USB Type-C Input)
Operating current	≤400mA
Number of wireless detectors of a repeater	≤20 Points
Number of repeaters of a Wi-Fi	10-50 Points
Connection time	≤10s
Wireless LoRa frequency range	413MHz-448MHz
Wireless Wi-Fi frequency range	2.4GHz
Environmental	Temperature range: -10 to 50°C (14~122°F) Humidity: 5 to 95% RH, non-condensing
Materials and colors	ABS, white
Size	104.5mm* 58mm* 29.1mm
Weight	About 135g