

Description

The Extinguishing control panel AW-GEC2169 is housed in the most attractive, modern designed, friendly user interface for easy operation and recognition. It has smaller size and easier for installation.


This panel can be used in FM200, CO2 and other gas fire extinguishing systems.



Features

- ✓ Automatic power switchover
- ✓ 24V2.3Ah High-capacity batteries
- ✓ Fault supervision and notification
- ✓ 4 relay output circuits
- ✓ 1 sounder output circuits
- ✓ Sounders and panel buzzer silence
- ✓ Meets all requirements of EN54-2, EN54-4 and EN12094-1

Dimensions (mm)

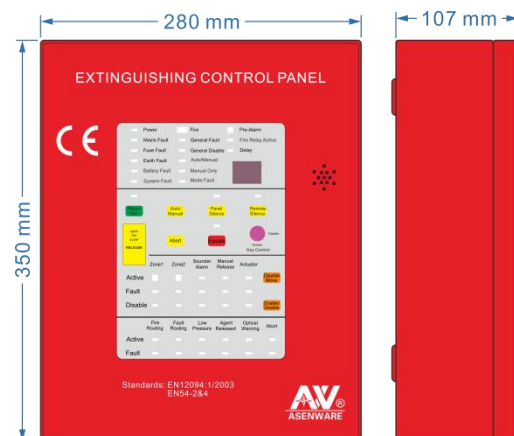

Technical Specification

Model	AW-GEC2169
Main Voltage	220VAC 50HZ
Batteries	2*12V/ 2.3Ah sealed lead acid gel, self-regulated
Battery low-voltage protection	21V
Detectors connection allowed each zone	16 detectors (except MCPs)
Alarm terminal output current	200mA maximum
EM valve output current	1.2A maximum
Relay contacts rating	1A @30VDC
Communication protocol	2 wires RS485 bus system
Auxiliary power output	24VDC, 0.2A max, current limited
Environmental	Temperature range: -5 to 40°C (23~104°F) Humidity: 5 to 95% RH, non-condensing
Weight	9.9Kg with batteries